

FPRRV Flexible Powered Rubber Coated Roller Conveyor (100Kg/m)

V Belt for Roller Driving, Suit for Bags Conveying



PRODUCTS DETAILS



Control Panel for Conveyor Operation



With one motor per meter to provide power



The legs and side links are connect by bolts.



Each pair of legs are reinforced by cross bar.





The rollers are driven by V belt



5mm thick strengthened telescopic side links



Mobile on 5" lockable swivel castors.

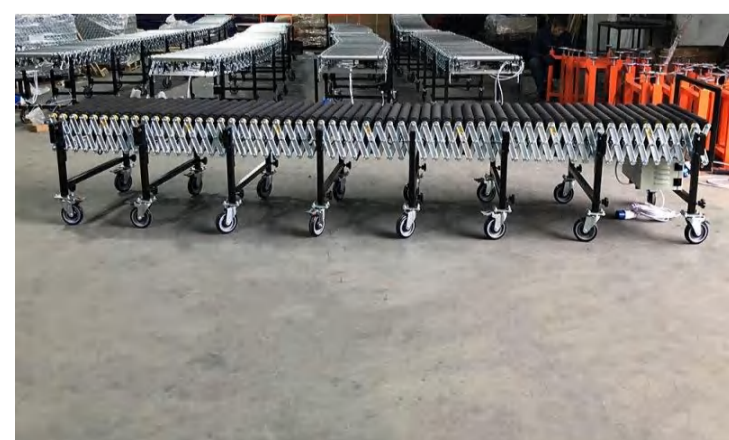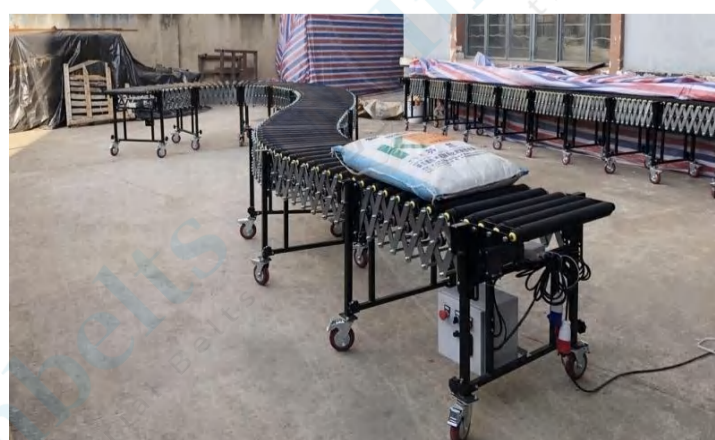

DATASHEET

FPRRV Series Flexible Powered Rubber Coated Roller Conveyor	
Roller Drive Belt	V belt
Conveyor Roller	Diameter 55mm rubber coated roller, Max. gap 138mm center to center
Drive Motor	90W/120W electronic governor motor
Conveyor Frame	5mm thickness galvanized curved join plates with better load
Supporting Leg	32x32 powder coated tube with 25x25 galvanized tube inside
Caster	5" high quality swivel lockable polyurethane casters
Control Box	Forward/Stop/Reverse, Emergency Stop, Speed Knob
Frequency Inverter	~

FPRRV Series Flexible Powered Rubber Coated Roller Conveyor							
Model	Open Length (mm)	Close Length (mm)	Width (mm)	Adjustable Height (mm)	Variable Speed (m/min)	Max. Load (kg/m ²)	Motor Power (w)
FPRRV4.8	4800	2200	600/800	700-1000	10-20	100	450
FPRRV6	6000	2750	600/800	700-1000	10-20	100	540
FPRRV7.2	7200	3300	600/800	700-1000	10-20	100	630
FPRRV8.4	8400	3850	600/800	700-1000	10-20	100	720
FPRRV9.6	9600	4400	600/800	700-1000	10-20	100	810
FPRRV10.8	10800	4950	600/800	700-1000	10-20	100	900
FPRRV12	12000	5500	600/800	700-1000	10-20	100	990